

Section

MV Outer sheath

ApplicationField
Laboratory
Production**PRODUCT BENEFITS**Quick set up
Fits on PR4, PRG3 and PRG4**TOOL CAPACITY**

Diameter	10 - 75 mm 0,394 - 2,953 inch
-----------------	----------------------------------

Thickness capacity	2,0 mm / 0,078 in
---------------------------	-------------------

TOOL DIMENSIONS

Length	50 mm
---------------	-------

Width	40 mm
--------------	-------

Height	40 mm
---------------	-------

Weight without box	0,04 Kg
---------------------------	---------

Packaging	None
------------------	------

Interchangeable longitudinal cutting head with one cutting depth

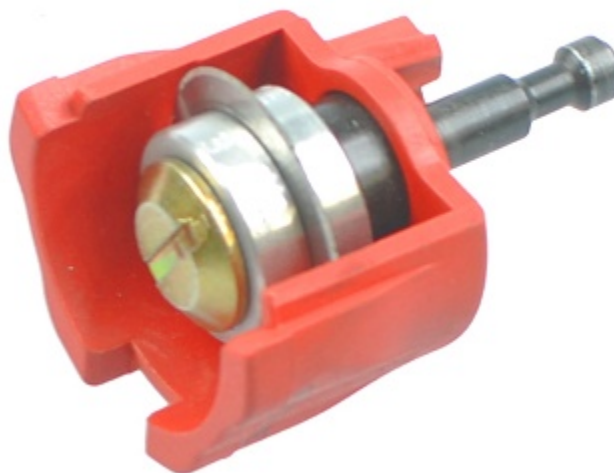
TO DO WHAT

The TRL with single cutting depth, fits on any PR4, PRG3, PRG4 pliers in order to change the longitudinal cutting depth of the pliers according to the thickness of the outer sheath of the cable

Any cutting depth is available from 0,5 mm/ 0,196 in up to 5 mm/0,196 in

How does the P/N works : TRL/**

**= Cutting depth (e.g : TRL/25 -> cutting depth 2.5 mm)

**Associated tool**

PRG3/C21-L212528 - Pliers for outer sheath for cable with O.D from Ø26mm/1,024in up to 52mm/2,047in

ALROC SAS

Z.I. de la Fonderie - 72160 TUFFE
FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

www.alroc.fr



Part Number	Diameter	Tool capacity	Dimensions			Packaging
		Thickness capacity	Length	Width	Height	
TRL/12	10 - 75 mm 0,394 - 2,953 in	1,2 mm / 0,047 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/15	10 - 75 mm 0,394 - 2,953 in	1,5 mm / 0,059 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/18	10 - 75 mm 0,394 - 2,953 in	1,8 mm / 0,070 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/20	10 - 75 mm 0,394 - 2,953 in	2,0 mm / 0,078 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/25	10 - 75 mm 0,394 - 2,953 in	2,5 mm / 0,098 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/30	10 - 75 mm 0,394 - 2,953 in	3,0 mm / 0,118 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/35	10 - 75 mm 0,394 - 2,953 in	3,5 mm / 0,138 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/40	10 - 75 mm 0,394 - 2,953 in	4,0 mm / 0,157 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/45	10 - 75 mm 0,394 - 2,953 in	4,5 mm / 0,177 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none
TRL/50	10 - 75 mm 0,394 - 2,953 in	5,0 mm / 0,196 in	50 mm 1,969 in	40 mm 1,575 in	40 mm 1,575 in	none