

Certifications

Approved by ENEDIS

Section

MV Multifunction

ApplicationField
Laboratory**PRODUCT BENEFITS**

Tuning of the pitch of the tool
Embedded wear pads to protect the tool from the contact with the outer sheath

TOOL CAPACITY

Diameter 16 - 40 mm
0,630 - 1,575 inch

Peelable semiconductor thickness capacity 0.4 - 1.5 mm

Insulation thickness capacity 7 mm

Stylus included SR

TOOL DIMENSIONS

Length 305 mm

Width 100 mm

Height 165 mm

Weight without box 1,46 Kg

Packaging Box

ALROC SASZ.I. de la Fonderie - 72160 TUFFE
FRANCE

Phone: +33 2 43 71 11 80

Fax number : +33 2 43 71 16 51

www.alroc.fr

Multifunction tool for outer sheath, peelable semiconductor and insulation

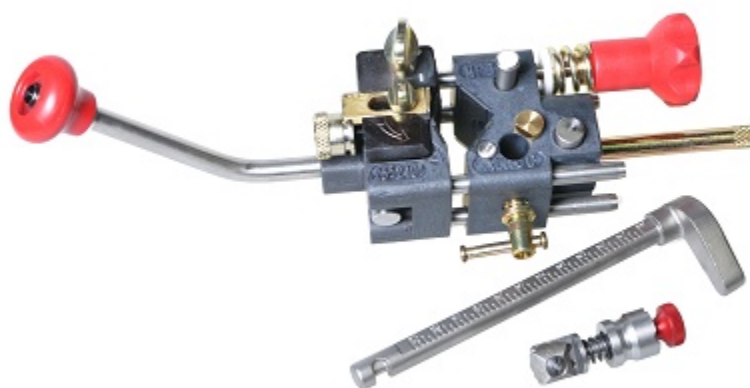
TO DO WHAT

The MF3/40 tools enables the user to :

Remove the outer sheath (PE-PVC-PR) with a straight and neat cut

Score the peelable semiconductor (with the SR scoring stylus delivered with the tool)

Set the length to be removed and remove the insulation with a straight and neat cut

**Options**

SRC - Scoring stylus for peelable semiconductor with chamfer

SCH - Chamfering stylus for insulation

Spare part

KIT-MF3/40 - Protective wear pads

SR - Scoring stylus for peelable semiconductor

LS - Spare blade for peelable semiconductor

LMF2 - Spare blade for primary insulation

BR - Thrust to set the length of insulation to be remove

VBB1 - Screw for locking the thrust

PCR - Quick set up right angled 45° handle

196855 - Straight handle M10

108098 - Clamping knob for blade

Associated tool

ALROC-FENTE - Tool to perform slits on cable's outer sheath

ROTO-TMG - Connector holder for bolted and clamping connections

DSP - Peelable semiconductor lifter



Part Number	Diameter	Tool capacity			Dimensions			Packaging
		Pelable semiconductor thickness capacity	Insulation thickness capacity	Stylus included	Length	Width	Height	
MF3/40	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	box
MF3/40-C	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SR	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SRC	16 - 40 mm 0,630 - 1,575 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/40-SSR	16 - 40 mm 0,630 - 1,575 in	Option	7 mm	None	305 mm 12,008 in	100 mm 3,937 in	165 mm 6,496 in	none
MF3/60	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-C	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	7 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SR	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SR	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SRC	16 - 58 mm 0,630 - 2,283 in	0.4 - 1.5 mm	11 mm	SRC	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none
MF3/60-SSR	16 - 58 mm 0,630 - 2,283 in	Option	7 mm	None	305 mm 12,008 in	115 mm 4,528 in	165 mm 6,496 in	none