





# ALROC - MV - Bonded semi-conductor ASC R1 - ASC R2

ISO 9001

BUREAU VERITAS  
Certification



A  
S  
C

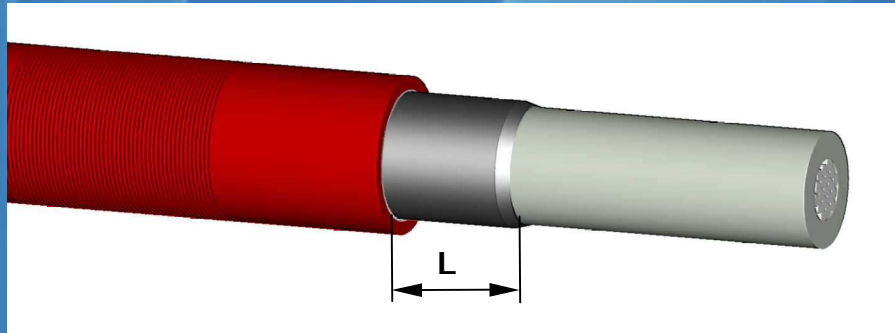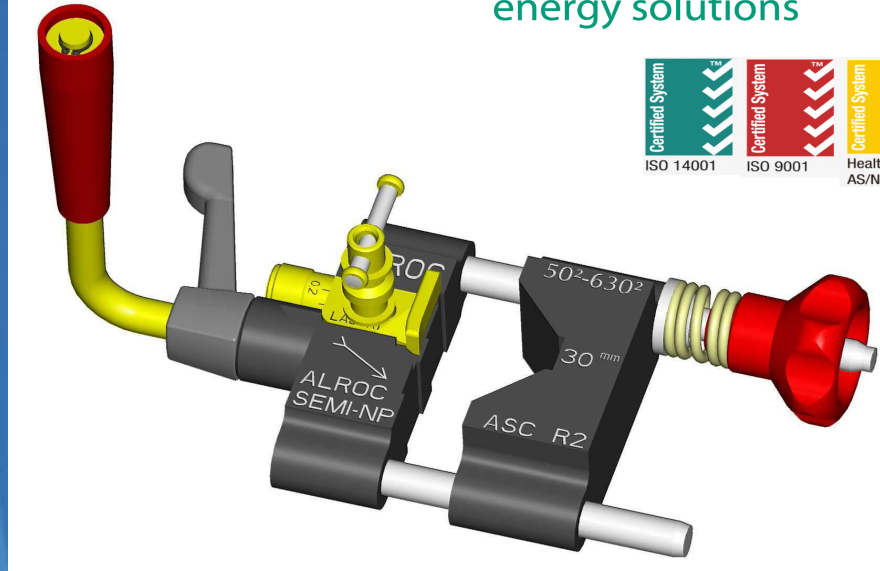

www.hylec.com.au

ALROC

## FUNCTIONS

ASC tool removes the bonded semi-conductor from MV and HV cables and chamfers the semi-conductor in a clean and swift manner.

## CHARACTERISTICS

- ☞ Removal of the bonded semi-conductor
- ☞ The blade is adjustable from 0.4 mm to 1.4 mm
- ☞ Remaining length of semi-conductor : **30 or 40 mm** without adjustment

ASC CHOICE	Model	ASCR1	ASCR2
	Ø sur semi-conductor	14 à 44 mm	20 à 50 mm
Sections	25 <sup>2</sup> à 240 <sup>2</sup>	50 <sup>2</sup> à 630 <sup>2</sup>	
Length	205 mm	220 mm	
Width	110 mm	120 mm	
Height	135 mm	135 mm	
Weight	620 g	800 g	

Edition 03/ 2006 /A6 - Noncontractual illustrations